


Gravel-Lok™ Overlay on Existing Gravel Base


Note: See Edging option CAD

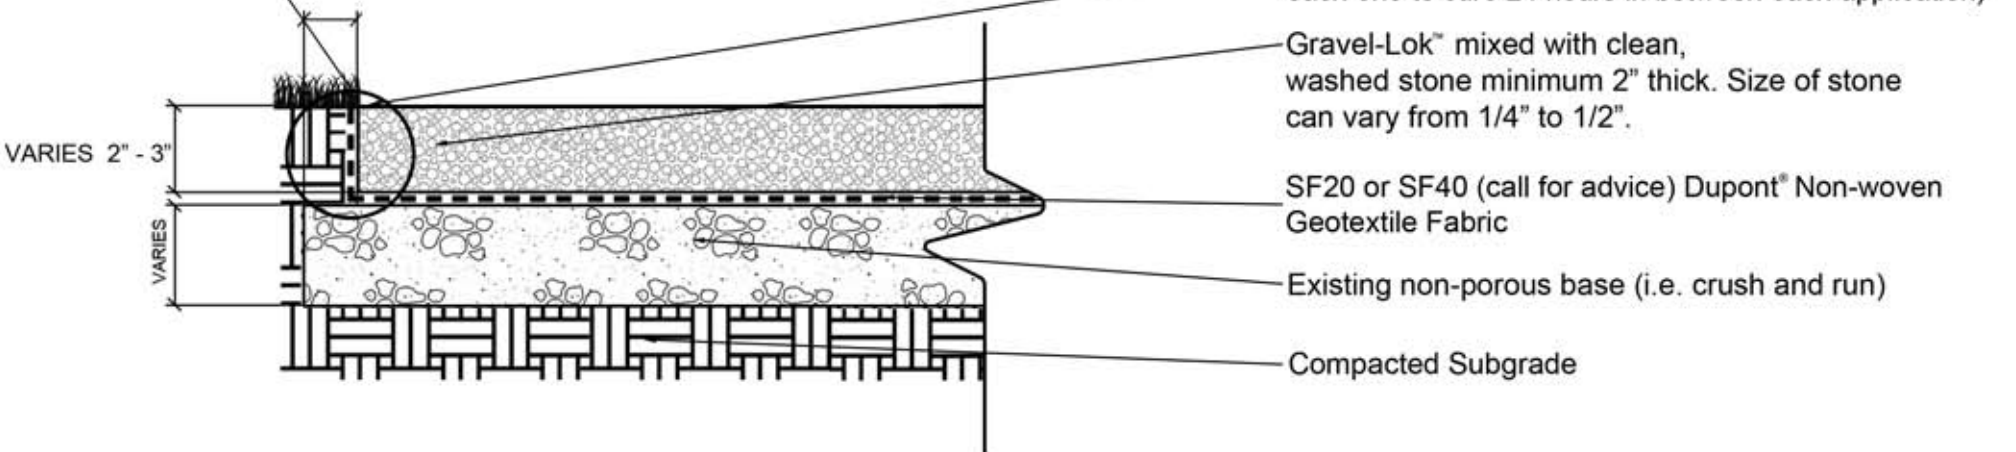

NOTES:

- * If you are using our product for the first time, please call for installation advice.
- * Within 4 - 6 weeks, inspect surface for loose stones. Repair promptly. Repeat inspection and repair annually. For repair methods, contact Contact Cell-Tek Geosynthetics LLC.
- * Mix liquid with stones and trowel them out (Bound Method). For a smooth surface using the Bound Method, the bounded surface must be a minimum of 3 times the thickness of the stone you are using.
- * Stones must be completely clean, dry and free from any fines.
- * Angular stones will create a stronger pavement than rounded stones.
- * For ADA compliance use stones which are 1/8" - 1/2" in size.

LEGEND

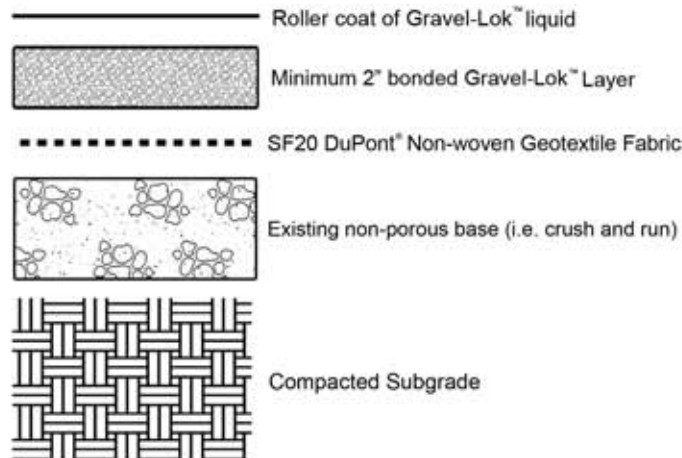

CELL-TEK
Geosynthetics

809 Barkwood Ct., Suite M
Linthicum Heights, MD 21090

Phone: 410.721.4844

Fax: 410.721.3844

Email: info@celltekdirect.com

www.celltekdirect.com