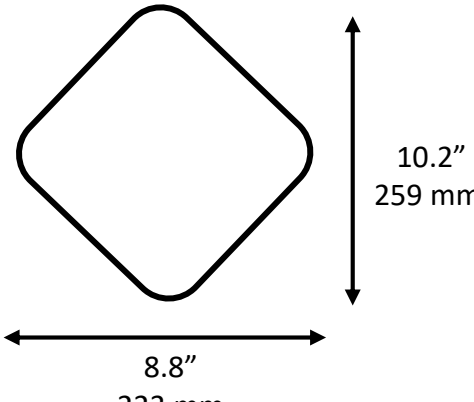


Load Support Grid

Cell Detail

	<p>Manufactured Cell Depths</p> <p>3" 75 mm 4" 100 mm 6" 150 mm</p> <p>Weld Distance: 14"</p> <p>Expanded Unit Dimensions 9' x 23.92' (2.74 m x 7.3 m)</p>
---	---

Material Specifications

Properties	Test Method	Test Value
Material Composition	ASTM D1505	Polymer; virgin HDPE Density: 0.9574 g/cm ³
Nominal Sheet Thickness	ASTM D5199	1.45 mm
Environmental Stress Cracking	ASTM D1693	>4500 Hrs.
Stabilizer	ASTM E682	Hindered amine light stabilizer (HALS) 1.0% by weight
Short Term Seam Peel Strength		3" (75 mm) 1065 N 4" (100 mm) 1542 N 6" (150 mm) 2170 N
Long Term Seam Peel Strength	A 100 mm (4inch) wide section sample shall support a (160 lb.) load for a period of 7 days (168 hrs.) minimum in a temperature controlled environment undergoing a temperature change on a 1 hour cycle from ambient room temperature to (130° F)	

Product Description

Item Code	Cell Depth	Expanded Unit Dimensions	Area / Unit	Pallet Qty
LSG-3	3" (75 mm)	9' x 23.92' (2.74 m x 7.3 m)	215 SF	24
LSG-4	4" (100 mm)	9' x 23.92' (2.74 m x 7.3 m)	215 SF	18
LSG-6	6" (150 mm)	9' x 23.92' (2.74 m x 7.3 m)	215 SF	12

Cell-Tek Geosynthetics assumes no liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. Cell-Tek Geosynthetics disclaims any and all express, implied, or statutory standards, warranties or guarantees, including without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to any equipment, materials, or information furnished herewith. This document should not be construed as engineering advice.

Cell-Tek Geosynthetics, LLC

809 Barkwood Court, Suite M, Linthicum Heights, Maryland 21090 U.S.A.

Tel: 410-721-4844 | Fax: 410-721-3844

info@celltekdirect.com | www.celltekdirect.com